


Dual Black Sleeve



antistatic
sleeve

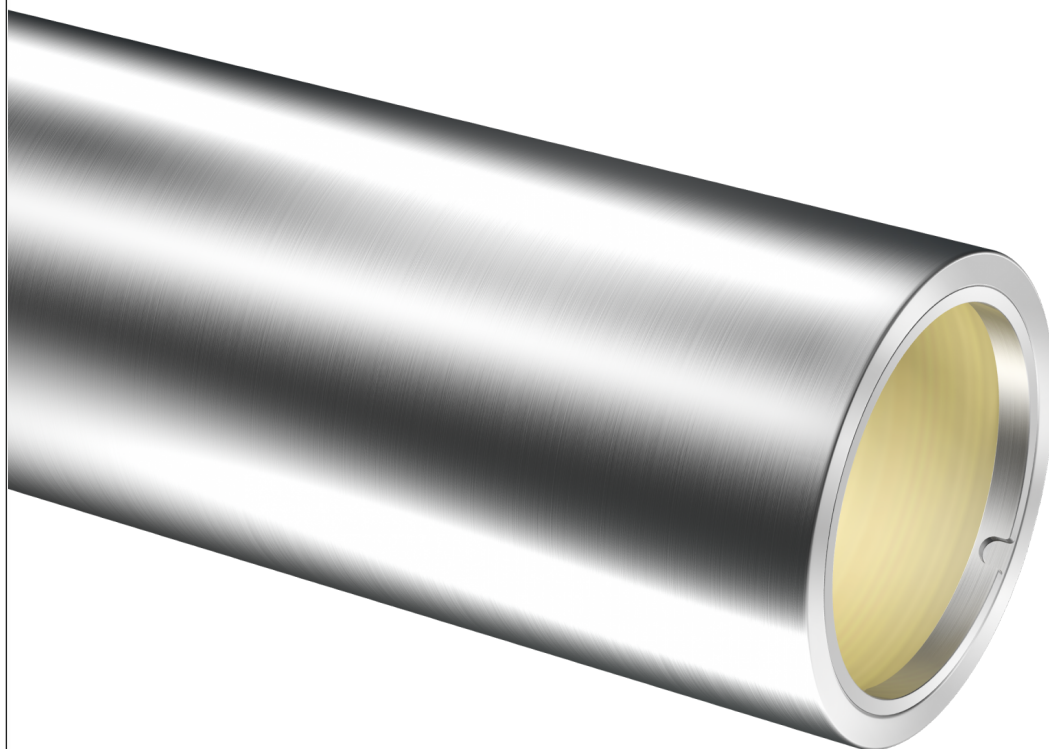

high longevity



humidity
resistant



manual
handling



more
productivity



quality
certified

Special application of the Speedwell Sleeve project to build an anodised aluminium coating press for solvent-based adhesives with the typical advantages of the sleeve system (quick change and easy handling). Rossini has developed a special conical fiberglass base sleeve designed to guarantee dimensional stability for the subsequent assembly process of the aluminium tube and the final coating.

All special Rossini compounds are available in both the Speedwell Sleeve and Rubber Roller configurations.

structure

Tapered base fibreglass sleeve (patent Speedwell system) assembled with a special anodised aluminum tube.

specifications

Colour	Aluminum
Compressed air for sleeve assembly	12 - 20 [bar] // 174 - 290 PSI Minimum capacity: 700 [l/min] with air input having a free passage with $D \geq 8$ [mm]
Working tolerance	External finishing with precision grinding ($R_a \geq 0,4$) with T.I.R. < 0.02 [mm] when measured on a mandrel with T.I.R. ≤ 0.005 [mm]

Rossini S.p.A. provides no warranties that the contents of this document demonstrate, in particular, the fitness of the products it contains for any specific purpose; we therefore ask customers to verify in advance that the product's characteristics are suitable for its intended use. Rossini S.p.A. reserves the right to update this publication and periodically modify its contents, including technical/commercial information, without further notice of the amendments or changes made. This document and any logos, trademarks and specifications etc. it contains are protected by copyright laws with all rights reserved.



Rossini World
Italy • France • Spain
Germany • United Kingdom
Romania • Brasil • China
United States • India

Rossini S.p.A. HeadQuarters
Via de Gasperi, 5
20027 Rescaldina - Milano - Italy
Tel. +39 0331 47 27 11 - Fax +39 0331 57 97 46
comm.dept@rossini-spa.it

WWW.ROSSINI-SPA.IT