


Microlast



hardness
range 00

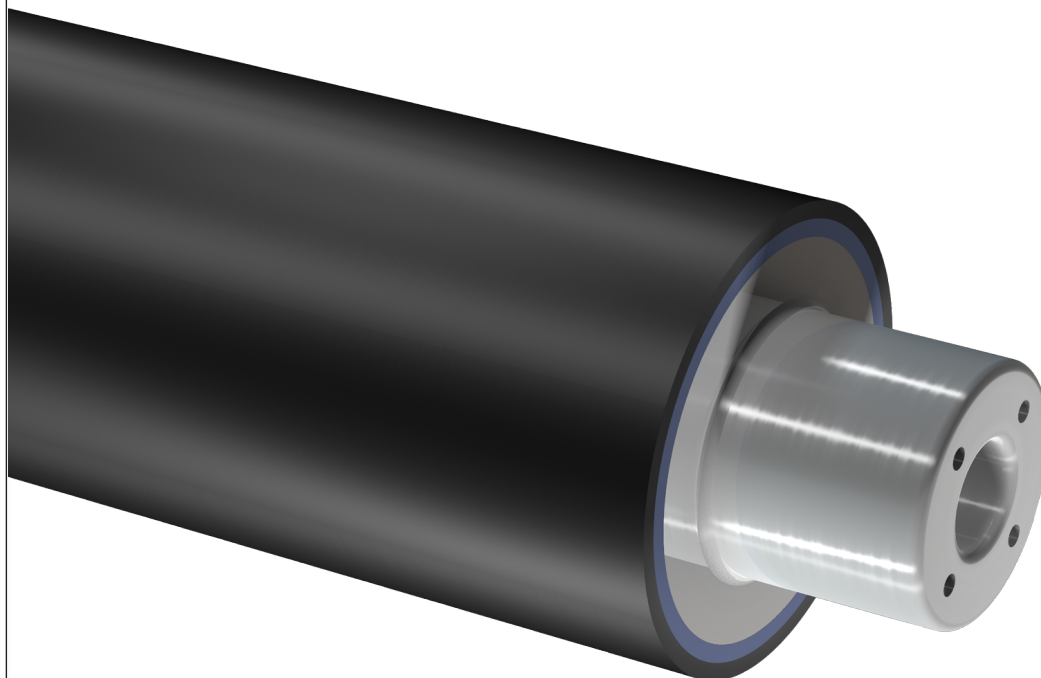

max load 15
[kg/cm]



max temp
90°C

Low density elastomer with high elastic properties also known as “foam rubber”; it is generally used for coating of spreader roller of the material to print in unwinding and winding stations. Cleaning with a blend of 75% ethyl alcohol and 25% ethyl acetate.

All the special Rossini compounds are available both in Speedwell Sleeve configuration and Rubber roller.

structure

Aluminium/steel roller coated with Microlast elastomer.

specifications

Colour	Black/Blue
Min/Max Diameter	100 - 550 [mm] // 3.937" - 21.654"
Min/Max including pins	150 - 5.000 [mm] // 5.882" - 196.078"
Coating thickness	20 - 40 [mm] // 0.787" - 1.575"
Surface hardness	50 and 60 Shore "00" +/-10 Shore "00"
Maximum resistance to pressure	20 [Kg/cm]
Maximum temperature resistance	90 °C - 194 °F
Resistance to chemicals	Gasolines - Alcohol - Water - Ozone

Rossini S.p.A. provides no warranties that the contents of this document demonstrate, in particular, the fitness of the products it contains for any specific purpose; we therefore ask customers to verify in advance that the product's characteristics are suitable for its intended use. Rossini S.p.A. reserves the right to update this publication and periodically modify its contents, including technical/commercial information, without further notice of the amendments or changes made. This document and any logos, trademarks and specifications etc. it contains are protected by copyright laws with all rights reserved.



Rossini World
Italy • France • Spain
Germany • United Kingdom
Romania • Brasil • China
United States • India

Rossini S.p.A. HeadQuarters
Via de Gasperi, 5
20027 Rescaldina - Milano - Italy
Tel. +39 0331 47 27 11 - Fax +39 0331 57 97 46
comm.dept@rossini-spa.it

WWW.ROSSINI-SPA.IT