


# Photoflex Stat



ROSSINI

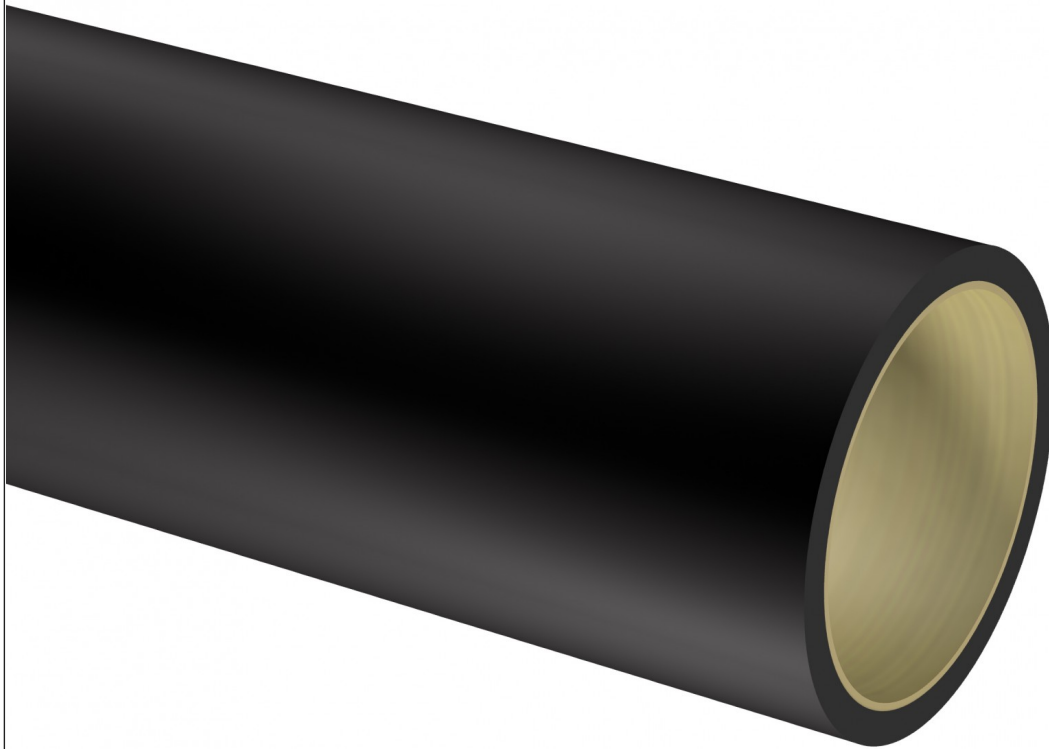

antistatic  
sleeve



hardness  
range 60-85



HD print level



more  
productivity



PTB Norm  
compliant

Conductive, fibreglass sleeve coated in special, anti-static polymer resistant to ethyl acetate, alcohol and Mek. The surface is perfectly finished for use in continuous flood-coating printing, varnishing and laser engraving.

## structure

Conductive, fibreglass base sleeve with special Photoflex Stat polymer coating.

## specifications

<b>Colour</b>	Black
<b>Min/Max Length - Tolerance UNI:ISO 2768T1m</b>	350 - 2.850 [mm] // 13.78" - 112.205"
<b>Thickness</b>	5 - 35 [mm] // 0.197" - 1.373"
<b>Surface hardness - Tolerance +/-3 Shore A</b>	60 - 85 Shore A
<b>Electrical resistance</b>	<1 MOhm
<b>Compressed air for sleeve assembly</b>	6 - 10 [bar] // 87 - 145 PSI Minimum capacity: 700 [l//min] with air input having a free passage with D => 8[mm]
<b>Operating temperature</b>	18° - 40 °C // 64,4 - 104 °F
<b>Register notch</b>	Milled notch
<b>Working tolerance</b>	External finishing with precision grinding (Ra=0.8) with T.I.R. < 0.03 mm] when measured on a mandrel with T.I.R. <= 0.005 [mm]
<b>Cleaning and Storage</b>	Use ethanol with an additional max 20% of ethyl acetate; store vertically

Rossini S.p.A. provides no warranties that the contents of this document demonstrate, in particular, the fitness of the products it contains for any specific purpose; we therefore ask customers to verify in advance that the product's characteristics are suitable for its intended use. Rossini S.p.A. reserves the right to update this publication and periodically modify its contents, including technical/commercial information, without further notice of the amendments or changes made. This document and any logos, trademarks and specifications etc. it contains are protected by copyright laws with all rights reserved.



**Rossini World**  
Italy • France • Spain  
Germany • United Kingdom  
Romania • Brasil • China  
United States • India

**Rossini S.p.A. HeadQuarters**  
Via de Gasperi, 5  
20027 Rescaldina - Milano - Italy  
Tel. +39 0331 47 27 11 - Fax +39 0331 57 97 46  
comm.dept@rossini-spa.it

**WWW.ROSSINI-SPA.IT**